

## AIR DRIVEN PUMP UNITS


Boltight's air driven pump units have been designed for use with all Boltight tooling where speed of operation is essential. They are easy to use, perform well and are incredibly reliable.

Boltight offers air driven pump units in a range of pressures and flow rates.




| SPECIFICATION             | STANDARD FLOW RATE                                                  | HIGH FLOW RATE                                                      |
|---------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| Available output pressure | 1000 bar, 1500 bar & 2500 bar<br>(14500 psi, 21750 psi & 36250 psi) | 1000 bar, 1500 bar & 2500 bar<br>(14500 psi, 21750 psi & 36250 psi) |
| Consumption of free air   | 800 litres per min.<br>(28 std. cubic ft. per min.)                 | 1600 litres per min.<br>(56 std. cubic ft. per min.)                |
| Air pressure required     | 4 - 7 bar<br>(60 - 100 psi)                                         | 4-7 bar<br>(60 - 100 psi)                                           |
| Weight (without oil)      | 19.5 kg<br>(42.9 lbs)                                               | 23 kg<br>(50.6 lbs)                                                 |
| Oil reservoir size        | 8.5 litre<br>(0.3 cubic ft.)                                        | 8.5 litre<br>(0.3 cubic ft.)                                        |
| Recommended oil           | ISO-10 , ISO-32 or ISO-46                                           | ISO-10 , ISO-32 or ISO-46                                           |

### OIL FLOW RATE - STANDARD

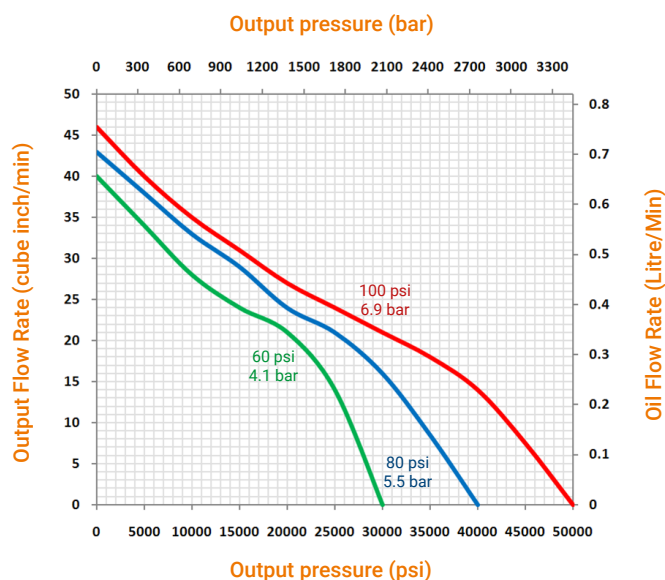

### OIL FLOW RATE - HIGH FLOW

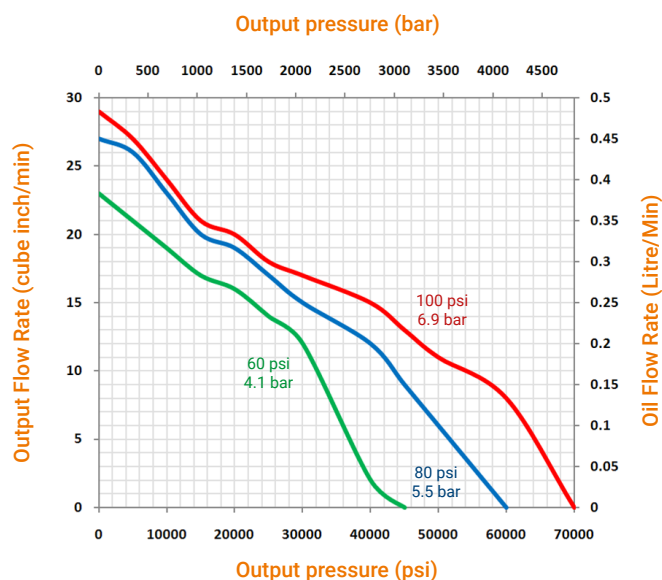

#### Production Unit

Boltight Limited

Tel: +44 (0) 1922 669222

Email: sales.boltight.uk@nord-lock.com

www.nord-lock.com

#### Sales Office

Nord-Lock Ltd

Tel: +44 (0) 1264 355557

Email: enquiries@nord-lock.co.uk

www.nord-lock.com

**NORD-LOCK**  
GROUP